


TT Series Oil / Air Cooler

12V/24V DC, asa rail system

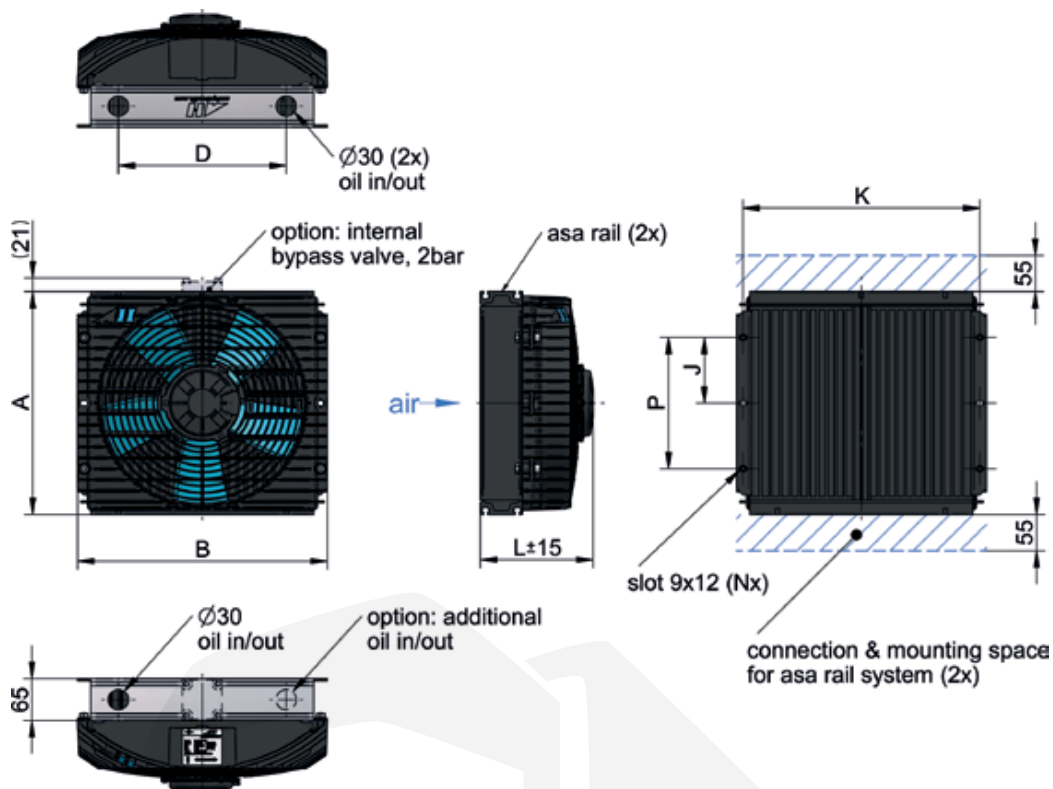

Dimensions

order number	description	A	B	D	J	P	K	L	N	weight
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[kg]
ASATT05RD01	TT 05 rail 12V DC	235	245	118	-	150	225	150	4	4,3
ASATT05RD02	TT 05 rail 24V DC	235	245	118	-	150	225	150	4	4,3
ASATT07RD01	TT 07 rail 12V DC	300	320	176	-	172	290	160	4	6,5
ASATT07RD02	TT 07 rail 24V DC	300	320	176	-	172	290	160	4	6,5
ASATT07RD03	TT 07 rail 12V DC h.p.	300	320	176	-	172	290	176	4	7,0
ASATT07RD04	TT 07 rail 24V DC h.p.	300	320	176	-	172	290	176	4	7,0
ASATT11RD01	TT 11 rail 12V DC	340	380	255	100	200	360	175	6	9,2
ASATT11RD02	TT 11 rail 24V DC	340	380	255	100	200	360	175	6	9,2
ASATT13RD01	TT 13 rail 12V DC	420	410	255	-	233	386	200	4	12,0
ASATT13RD02	TT 13 rail 24V DC	420	410	255	-	233	386	200	4	12,0
ASATT16RD01	TT 16 rail 12V DC	465	460	328	153	306	436	190	6	14,9
ASATT16RD02	TT 16 rail 24V DC	465	460	328	153	306	436	190	6	14,9
ASATT21RD01	TT 21 rail 12V DC	605	462	328	208,5	417	436	243	6	19,4
ASATT21RD02	TT 21 rail 24V DC	605	462	328	208,5	417	436	243	6	19,4
ASATT21RD03	TT 21 rail 12V DC h.p.	605	462	328	208,5	417	436	261	6	20,4
ASATT21RD04	TT 21 rail 24V DC h.p.	605	462	328	208,5	417	436	261	6	20,4
ASATT25RD01	TT 25 rail 12V DC	605	555	422	208,5	417	530	266	6	22,7
ASATT25RD02	TT 25 rail 24V DC	605	555	422	208,5	417	530	266	6	22,7

Radiator Style B

material:	aluminum
working temperature range:	-20°C to +80°C (oil temperature)*
air fin shape:	wavy
working pressure:	26 bar (static)

Installation System (see more information on page 32)

connection BSP 1"	ILLZSET5G25 (1 set per cooler required)
connection BSP 1 1/4"	ILLZSET5G32 (1 set per cooler required)
connection BSP 1" straight	ILLZSET5G25A (1 set per cooler required)
connection BSP 1" straight+stnd.	ILLZSET5G25B (1 set per cooler required)

*...the indicated temperature is the maximum inlet temperature for the cooler radiator. Depending on the sealings in use, the application needs appropriate checking.



www.hydrotruck.cz
info@hydrotruck.cz

Hydrotruck s.r.o.
 Tovačovská 3457/4a
 750 02, Přerov
 Česká republika

TT Series Oil / Air Cooler

12V / 24V DC, asa rail system



Technical Data

order number	description	motor power [kW]	current [A]	protection	air flow [kg/s]	noise level [dB(A)]	optional internal bypass (2 bar) cooler order number
ASATT05RD01	TT 05 rail 12V DC	0,11	8,5	IP 68	0,19	74	on request
ASATT05RD02	TT 05 rail 24V DC	0,11	4,2	IP 68	0,19	74	on request
ASATT07RD01	TT 07 rail 12V DC	0,13	9,6	IP 68	0,32	74	ASATT07RD01BP
ASATT07RD02	TT 07 rail 24V DC	0,14	5,2	IP 68	0,32	74	ASATT07RD02BP
ASATT07RD03	TT 07 rail 12V DC h.p.	0,20	15,6	IP 68	0,40	78	ASATT07RD03BP
ASATT07RD04	TT 07 rail 24V DC h.p.	0,21	8,1	IP 68	0,40	78	ASATT07RD04BP
ASATT11RD01	TT 11 rail 12V DC	0,29	22,6	IP 68	0,57	77	ASATT11RD01BP
ASATT11RD02	TT 11 rail 24V DC	0,30	11,4	IP 68	0,57	77	ASATT11RD02BP
ASATT13RD01	TT 13 rail 12V DC	0,29	22,6	IP 68	0,65	77	ASATT13RD01BP
ASATT13RD02	TT 13 rail 24V DC	0,30	11,4	IP 68	0,65	77	ASATT13RD02BP
ASATT16RD01	TT 16 rail 12V DC	0,28	21,2	IP 68	0,75	79	ASATT16RD01BP
ASATT16RD02	TT 16 rail 24V DC	0,30	11,4	IP 68	0,75	79	ASATT16RD02BP
ASATT21RD01	TT 21 rail 12V DC	0,28	21,2	IP 68	0,82	78	ASATT21RD01BP
ASATT21RD02	TT 21 rail 24V DC	0,30	11,4	IP 68	0,82	78	ASATT21RD02BP
ASATT21RD03	TT 21 rail 12V DC h.p.	0,33	25,5	IP 68	1,02	81	ASATT21RD03BP
ASATT21RD04	TT 21 rail 24V DC h.p.	0,34	13,2	IP 68	1,02	81	ASATT21RD04BP
ASATT25RD01	TT 25 rail 12V DC	0,28	21,2	IP 68	0,88	78	ASATT25RD01BP
ASATT25RD02	TT 25 rail 24V DC	0,30	11,4	IP 68	0,88	78	ASATT25RD02BP


Performance

specific cooling performance


all products
water/glycol
compatibel



Contact us!

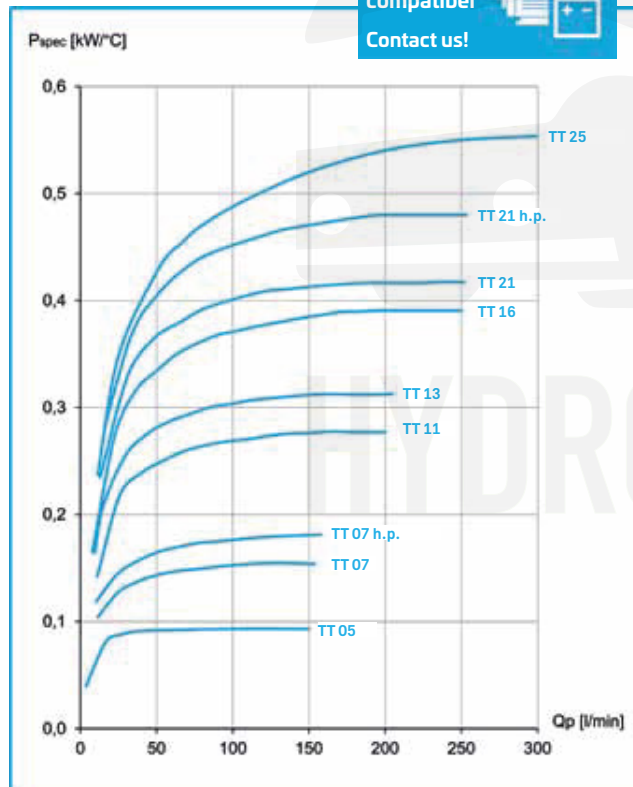

pressure drop at 30cSt

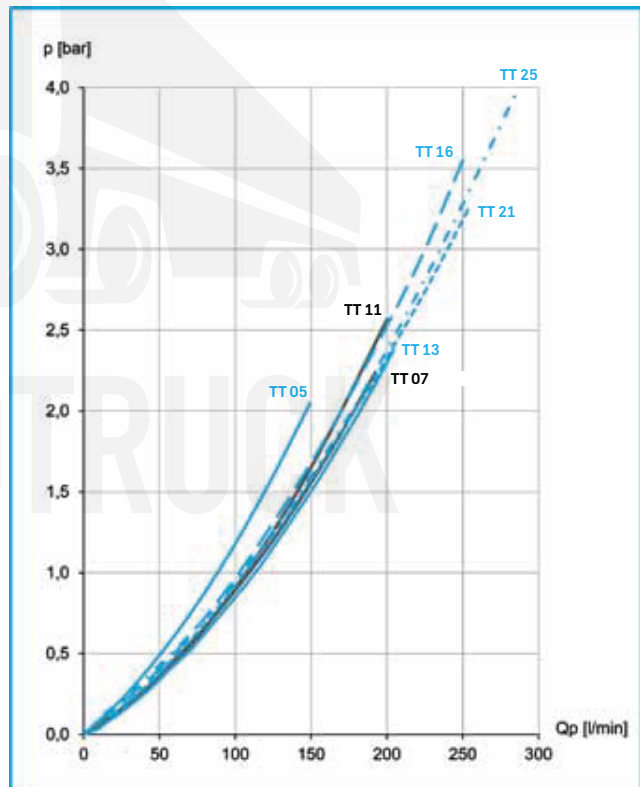

Options

temperature control	ILLZTC12-2K or 24-2K + ILLZTT5069K (page 37, 38)
temperature switches	ILLZTH5069K, ILLZTH4765K, ILLZTH6065K (page 39)
protection housings	available for sizes TT 07, 11 and 16 (page 35)
foot mounting	ILLEFUSSTTHDK (page 34)
internal bypass	alternative bypass settings (1bar / 5bar)



www.hydrotruck.cz
info@hydrotruck.cz

Hydrotruck s.r.o.
Tovačovská 3457/4a
750 02, Přerov
Česká republika