

BENNE BOT 2


I - Benna bivalve con due cilindri orizzontali con grande capacità di carico, particolarmente adatta per impieghi gravosi

GB - Clamshell bucket with two horizontal cylinders with great intake, especially suitable for heavy duty works


D - Schüttgutgreifer mit zwei liegenden Zylindern mit großem Inhalt, besonders für schweren Einsatz geeignet

F - Benne preneuse à deux vérins horizontaux de grande capacité, particulièrement recommandée pour les gros travaux

E - Cuchara bivalva con dos cilindros horizontales de gran capacidad, particularmente adecuada para trabajos gravosos

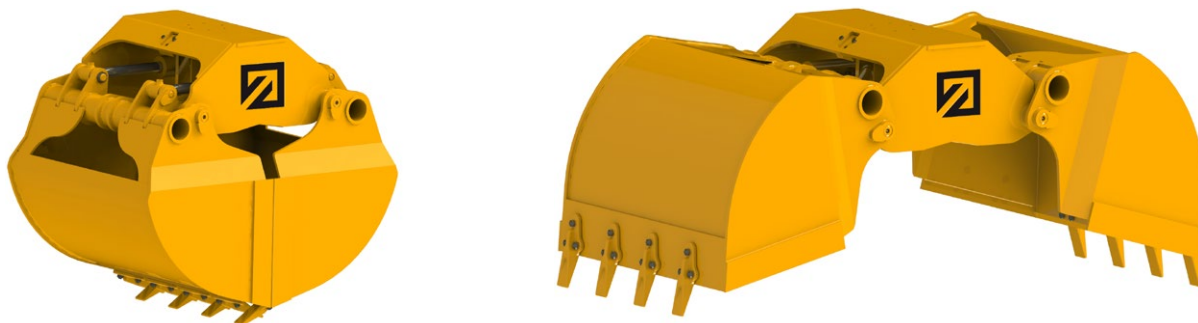

DISEGNO TECNICO / TECHNICAL DRAWING

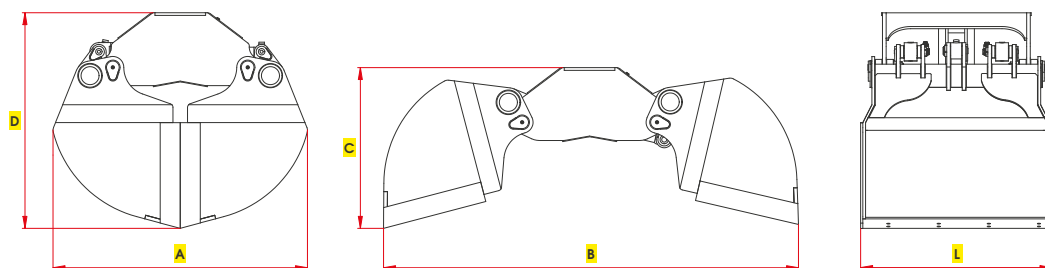

Portata gru a braccio sfilato / Lifting capacity at the end of boom



Peso escavatore / Excavator weight

Modello Type	Capacità Capacity	Portata Load	Peso Weight	Pressione Pressure	Portata olio Oil flow	Ton.	Ton.	A	B	C	D	L
	Lt	kg	kg	Max bar	Lt/min			mm	mm	mm	mm	mm
BOT2 400	400	2000	430	250	50	1,0-2,5	6,0-12	1140	1840	710	950	840
BOT2 500	500	2500	460	250	50	1,5-2,5	6,0-12	1140	1840	710	950	1040
BOT2 790	770	3000	615	250	50	1,5-2,8	8,5-15	1140	1840	710	950	1540
BOT2 800 P	750	2500	710	250	100	1,8-2,8	10-18	1400	2270	880	1180	860
BOT2 1000 P	860	3000	850	250	100	2,0-3,0	12-20	1400	2270	880	1180	1050
BOT2 1200 P	1020	3500	880	250	100	2,0-3,0	15-25	1400	2270	880	1180	1250
BOT2 1500 P	1230	4000	1100	250	100	2,5-3,5	15-25	1400	2270	880	1180	1500
BOT2 2000 P	1750	4500	1580	250	120	2,5-3,5	15-28	1400	2270	880	1180	2000

P = Pesante - Heavy duty